

EZYTAP75T & EZYTAP7800T

Elegant, Reliable, Under Counter Boiler For
Hot & Ambient Water Or Hot & Chilled Water



EZYTAP75T

14ltr/hour of 95°C hot water with
copious amounts of un-chilled water



Features

The EZYTAP75T is a powerful undercounter hot water boiler which also dispenses copious amounts of un-chilled water.

The EZYTAP7800T combines the powerful undercounter boiler with an undercounter chiller to dispense hot & chilled water.

The EZYTAP has a 24cm dispensing height for ease of bottle filling.

Unique boiler scale protection in hard water areas.

The South and Central areas of England are known for high levels of scale – the enemy of boilers! Unlike other tap boilers the EZYTAP has two separate mains water connections. One for the boiler and the other for the ambient supply or the chilling unit. In hard water areas the boiler can be connected to a proper **Scale Removal Filter** and the ambient or chilling to a cheaper carbon filter. This arrangement extends the life of the **Scale Removal Filter** significantly. In a soft water area, both the boiler and chiller can be connected to a joint single carbon filter

Attention: only proper scale removal filters will protect a boiler from scale and eliminate the need for constant descaling.



EZYTAP7800T

14ltr/hour of 95°C hot water plus 8ltr/hour
of chilled water between 6 – 10°C



refreshingly different

EZYTAP75T & EZYTAP7800T

Elegant, Reliable, Under Counter Boiler For Hot & Ambient Water Or Hot & Chilled Water

Specifications and performance

Model	Dispensing Height	Hourly output			Dimensions (mm)	Temp
		Hot	Ambient	Chilled		
EZYTAP75T	24cm	14ltr	indefinite	n/a	329h, 220w, 352d	95C max
EZYTAP7800T	24cm	14ltr	n/a	8ltr	Boiler 329h, 220w, 352d	95C max
					Chiller 290h, 410w, 210d	6 – 10C

EZYTAP75T

EZYTAP7800T

Description

EZYTAP

- Chrome faucet with electronic controls
- Touch control dispensing taps
- Flashing indicator light when heating
- Hot water safety tap
- Dispensing height: EZYTAP75T/7800T - 24cm



Under sink Boiler and Chiller unit


- The EZYTAP75T/7800T Boiler is an atmospheric boiler with a powerful 2KW SUS316 ring type heating element. The boiler can be easily accessed for descaling or maintenance
- The EZYTAP75T dispenses 14ltr/hour of 95°C hot water and copious amounts of un-chilled water
- The EZYTAP7800T dispenses hot and chilled water. It includes our UC800B Undersink Chiller, which provides 8ltr/hour of chilled water between 6 – 10°C
- The UC800B Undersink Chiller is a compressor chilled cooler with a static fan assisted condenser
- It is recommended that the EZYTAP Boiler and the UC800B chiller units are installed with 10cm ventilation space all round, to avoid over-heating

Drip Tray

- EZYTRAY2: Drip tray connects to the EZYTAP column

Scale protection

- The two separate mains water inlets allow for the installation of a scale removal filter on the boiler inlet and a much more cost-effective taste, odour and turbidity carbon block filter on the ambient/chilled side
- Scale removal filters are expensive and since their effective 'life' is measured in litres of water passing through it, it is important to use it only on the boiler side
- Soft water areas only require a single carbon filter connected to a combined boiler and ambient/chilled inlet
- The EZYTAP boiler can be opened for descaling and servicing.

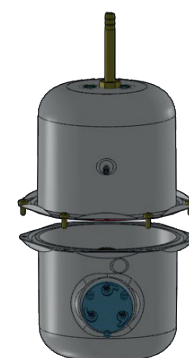


Venting

- An expansion chamber absorbs the steam/water pressure created during boiling and reduces the risk of drips of water or steam from the tap. It is nevertheless recommended to mount the EZYTAP over a sink or drip tray.


EZYTAP7800T in soft water area

Single carbon block filter for the boiler and the chiller side.

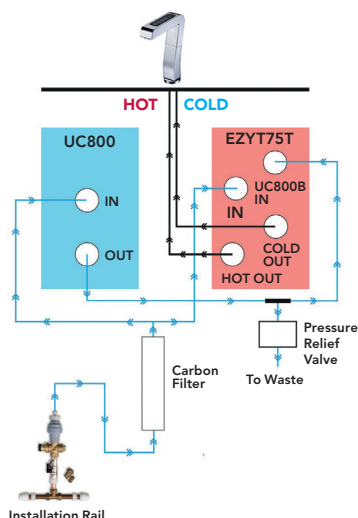

EZYTAP7800T in hard water area

Scale removal filter for the boiler and a carbon block for the chiller side.

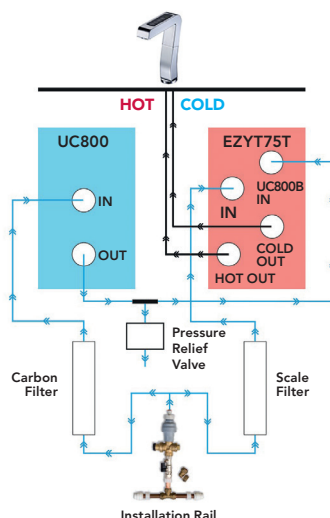

EZYTAP75T in hard water area

Scale removal filter for the boiler and a carbon block for the ambient side.

